



## ΦΩΤΙΖΟΜΕΝΟΙ ΙΣΤΟΙ FRP

Χάρη σε μια ειδική εκτύπωση, και με επιπλέον εσωτερικό φωτισμό, ταιριάζει με το περιβάλλον ή χρησιμεύει ως ενδιαφέρον διαφημιστικό μέσο

Μπορείτε να σχεδιάσετε το δικό σας σχέδιο, π.χ. με το λογότυπο της εταιρείας, το εθνόσημο του Δήμου, την οδό, η του πάρκου

Οι κολώνες φωτίζονται από το εσωτερικό με μια ανεξάρτητη πηγή φωτός, χάρη στην οποία το επάνω φωτιστικό μπορεί να απενεργοποιηθεί το βράδυ

Ο εσωτερικός φωτισμός εξασφαλίζει τη σωστή οπτική παρακολούθηση του δρόμου ή του μονοπατιού

Οι σύνθετοι ιστοί FRP μπορούν να εξοπλιστούν με πρόσθετες συσκευές SMART που ανταποκρίνονται στις σύγχρονες ανάγκες και διευκολύνουν

τη ζωή

## DESIGNPOLE

### SKPW-D with a part dug into the ground



Patterns of poles in the standard offer



birch candy wood clover



Individual patterns:



with a part dug into the ground SKPW-D

| pole symbol | H<br>(m) | BD<br>(mm) | TD<br>(mm) | CP<br>(mm) | LPH<br>(m) | GH<br>(m) | W<br>(kg) |
|-------------|----------|------------|------------|------------|------------|-----------|-----------|
| SKPW-D 3,0  | 3,0      | 130, 150   | 60         | 130        | 4,0        | 1,0       | 10        |
| SKPW-D 4,0  | 4,0      | 130, 150   | 60         | 130        | 5,0        | 1,0       | 12        |
| SKPW-D 5,0  | 5,0      | 175        | 60         | 130        | 6,0        | 1,0       | 19        |
| SKPW-D 6,0  | 6,0      | 175        | 60         | 130        | 7,0        | 1,0       | 22        |
| SKPW-D 7,0  | 7,0      | 193        | 60         | 130        | 8,2        | 1,2       | 40        |
| SKPW-D 8,0  | 8,0      | 193        | 60         | 130        | 9,2        | 1,2       | 50        |
| SKPW-D 9,0  | 9,0      | 193        | 60         | 130        | 10,5       | 1,5       | 59        |
| SKPW-D 10,0 | 10,0     | 193        | 60         | 130        | 11,8       | 1,8       | 65        |
| SKPW-D 11,0 | 11,0     | 193        | 60         | 130        | 12,8       | 1,8       | 71        |
| SKPW-D 12,0 | 12,0     | 193        | 60         | 130        | 13,8       | 1,8       | 77        |


At the customer's request, it is possible to produce poles with non-standard parameters. Possibility to strengthen the pole for difficult operating conditions..

### Internal illumination of the LED pole

5W; 230VAC; 50/60Hz; 4000K; 25°

This function allows to aesthetically highlight the unique external texture of the column (e.g. birch pattern). The internal illumination of the pole also enables the reduction of operating costs or replacement of the luminaire's function (the so-called visual tracking effect) in a situation where there is no pedestrian traffic, and thus it is not necessary to operate the luminaire at full power.

in-ground poles are installed without the use of heavy equipment or expensive prefabricated foundations

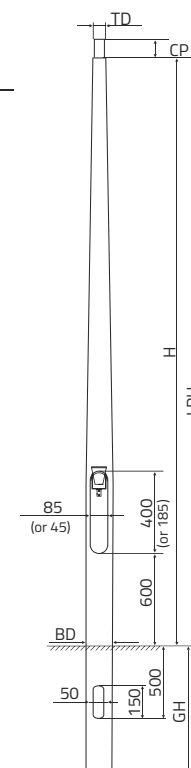

## DESIGNPOLE

### SKPF-D mounted on the foundationt



Patterns of poles in the standard offer



birch candy wood clover



mounted on the foundationt SKPF-D


| pole symbol | H<br>(m) | BD<br>(mm) | TD<br>(mm) | CP<br>(mm) | BPL<br>(mm) | BPT<br>(mm) | BPHD W<br>(mm) | (kg) |
|-------------|----------|------------|------------|------------|-------------|-------------|----------------|------|
| SKPF-D 3,0  | 3,0      | 130, 150   | 60         | 130        | 260         | 8           | 200            | 15   |
| SKPF-D 4,0  | 4,0      | 130, 150   | 60         | 130        | 260         | 8           | 200            | 18   |
| SKPF-D 5,0  | 5,0      | 175        | 60         | 130        | 260         | 8           | 200            | 24   |
| SKPF-D 6,0  | 6,0      | 175        | 60         | 130        | 260         | 8           | 200            | 26   |
| SKPF-D 7,0  | 7,0      | 193        | 60         | 130        | 400         | 8           | 300            | 55   |
| SKPF-D 8,0  | 8,0      | 193        | 60         | 130        | 400         | 8           | 300            | 60   |
| SKPF-D 9,0  | 9,0      | 193        | 60         | 130        | 400         | 8           | 300            | 70   |
| SKPF-D 10,0 | 10,0     | 193        | 60         | 130        | 400         | 8           | 300            | 75   |
| SKPF-D 11,0 | 11,0     | 193        | 60         | 130        | 400         | 8           | 300            | 80   |
| SKPF-D 12,0 | 12,0     | 193        | 60         | 130        | 400         | 8           | 300            | 85   |

At the customer's request, it is possible to produce poles with non-standard parameters. Possibility to strengthen the pole for difficult operating conditions.

### Internal illumination of the LED pole

5W; 230VAC; 50/60Hz; 4000K; 25°

This function allows to aesthetically highlight the unique external texture of the column (e.g. birch pattern). The internal illumination of the pole also enables the reduction of operating costs or replacement of the luminaire's function (the so-called visual tracking effect) in a situation where there is no pedestrian traffic, and thus it is not necessary to operate the luminaire at full power.

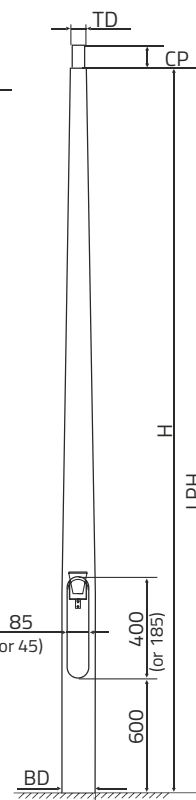

## DECORPOLE

it is possible to order poles in the DECORPOLE version, characterized by an elegant finish at the bottom of the post.

Decorative composite base emphasizes the character of the product and increases the aesthetics of a given place.





**NORATEX ABEE**

**ΕΝΕΡΓΕΙΑΚΑ ΣΥΣΤΗΜΑΤΑ & ΦΩΤΙΣΜΟΣ LED**

17° Χλμ. Λ. ΣΠΑΤΩΝ 15351 ΠΑΛΛΗΝΗ Τηλ.: 210 6030221

Email: [georgios@noratex.gr](mailto:georgios@noratex.gr) Kiv: 6944 262902

Email: [neofitos.ch@noratex.gr](mailto:neofitos.ch@noratex.gr) Kiv: 6944 536700

Email: [thania@noratex.gr](mailto:thania@noratex.gr) Kiv: 6944255779

NEO web site: <http://www.noratex.gr>